

SPECIFICATIONS - PYKA


| PARAMETER | 85 | 125 |
|---------------------------|----------------------------|----------|
| Material | Most Thermal plates | |
| Material width, max | 830 mm | 1230 mm |
| Material length, min | 285 mm | 285 mm |
| Material Thickness | 0.15 / 0.3 mm | |
| Processing speed | 60 - 150 cm/min | |
| Tank capacity, Dev | 28 lts. | 42 lts. |
| Wash Tank | 12 lts. | 22 lts. |
| Tank capacity, Gum | Circulating from container | |
| Brush speed, Dev | 120 RPM | |
| Developer temp-adjustable | 20 – 35 °C | |
| Dev. Replenishment | 0 – 400 ml/m2 | |
| Connected load | 3.5 KW | |
| Power | 230V ,1W+N+PE or 2W+PE | |
| Dryer temp | 70°C max | 70°C max |
| Water inlet port | 20 mm | |
| Water supply pressure | 1 bar | |
| Drain outlet port | 32 mm | |

Note : Due to continuous improvement in design, specifications are subject to change without notice

STANDARD EQUIPMENT : Feed tray, developing concept with one brush, Oxidation cover, filter for developer and water inlet area based replenishment system ,Chilling unit, wash section with one brush and water recirculation, Re-circulating hot air dryer, Delivery tray, Standard spares, Standard CTP interface with ready and busy signals

Accessories (Optional) : Plate stacker, Second brush in developer section for negative application

| Reference | Processor | |
|-----------|-----------|----------|
| | MYKA 85 | MYKA 125 |
| A | 121 | 161 |
| B | 116 | 135 |
| C | 98 | 98 |
| D | 84 | 84 |
| E | 220 | 225 |

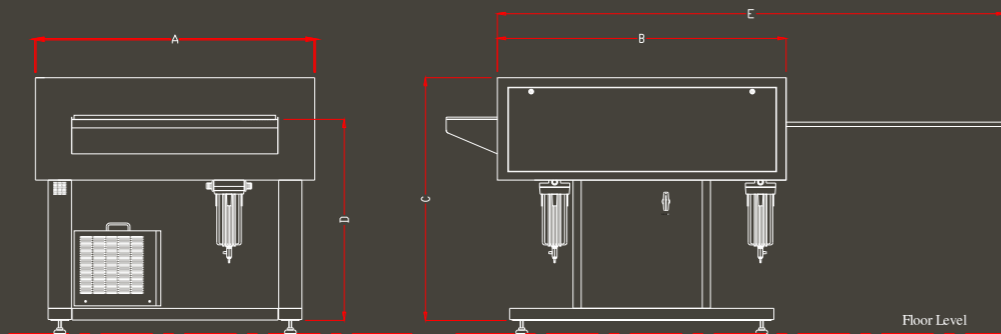

Proteck International Ltd.

Unit 6, Clifton Mills, Bailiff Bridge Brighouse,
West Yorkshire, HD 6 4JJ, England.
Tel : + 44 7843 472408
Email : info@proteckinternational.co.uk

Proteck Circuits & Systems Pvt. Ltd.

15, Medavakkam Road, Sholinganallur,
Chennai - 600 119, India.
Tel : + 91-44-2450 6000 Fax : + 91-44-2450 6006
Email : info@proteck.co.in Web : www.proteck.co.in



PYKA Series Thermal CTP Processor
Ultra Reliable Heavy Duty Processor

PYKA SERIES

The Compact Thermal Processing System With extreme reliability

Heavy Duty Processor good for processing 30000 sq.m per annum

Ultra reliable functioning with reliable controls

Very compact design smallest footprint processor on the market

Stainless steel construction

Low power consumption

Optional three year warranty

PYKA SERIES




CONTROL PANEL

Simplified user friendly controls
Extremely reliable operation



WATER RE-CIRCULATOR

Built in water re-circulator for wash section
Built in filter for inlet water
Programmable fresh water addition per plate via solenoid

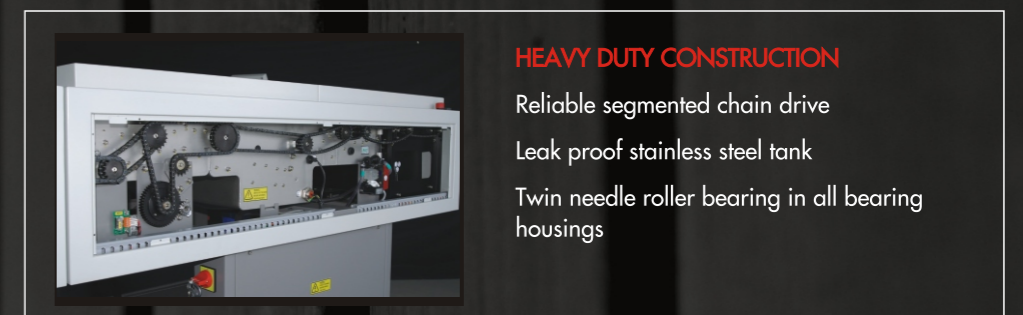

HEAVY DUTY CONSTRUCTION

Reliable segmented chain drive
Leak proof stainless steel tank
Twin needle roller bearing in all bearing housings



DIP TANK PROCESSING

Compact design
Effective oxidation cover
Stainless steel construction
Fully submerged brush
Easy maintenance and cleaning

PYKA Series Thermal CTP Processor
Ultra Reliable Heavy Duty Processor